
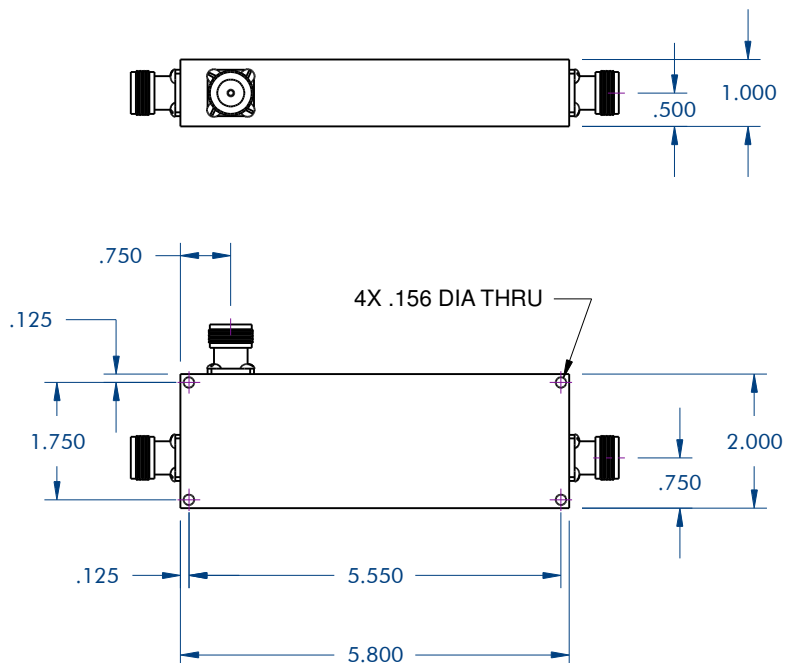


CONNECTOR CONFIGURATIONS

Customizeable N or SMA Female.

P/N	Mainline	Coupled
1CN1352-DB	N-Female	N-Female
1CNS1352-DB	N-Female	SMA-Female
1CS1352-DB	SMA-Female	SMA-Female

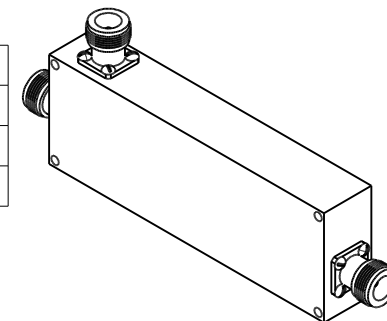

SKU-dB	Cpl'g Tolerance	Cpl'g Flatness	Ins'n Loss	Forward Power
1CN1352-03	± 1.00	± 1.00	3.3	35
1CN1352-05			2.2	45
1CN1352-06			1.8	60
1CN1352-07			1.7	75
1CN1352-10			0.9	100
1CN1352-15	± 1.25	± 1.25	0.4	150
1CN1352-20	± 1.50	± 1.50	0.3	
1CN1352-30			0.2	

ELECTRICAL SPECIFICATIONS

Frequency Range	130 ~ 520	MHz
Coupling Tolerance	SEE TABLE	dB, Nom'l.
Flatness (Sensitivity)	SEE TABLE	dB, Max.
Directionality	20	dB, Min.
Main Line Insertion Loss	SEE TABLE	dB, Max.
Main Line VSWR	1.25	:1, Max.
Coupled Port VSWR	1.25	:1, Max.
Forward Average Power	SEE TABLE	Watts, Max.

Impedance	50	Ω, Nom'l.
Passive Intermodulation	-150 dBc	BY DESIGN ONLY

MECHANICAL SPECIFICATIONS

R.F. Interface	N or SMA Female Customizable
Operating Temperature	-40 ~ +85 °C (Tested at +25°C)
Environment	Indoor use only.
Humidity	95%, Non-Condensing
Weight	1.14 lb. Nom'l.



622 State Hwy. 10 West, Unit 9, Whippany, New Jersey, 07981
 Sales@WerbelMicrowave.com

Tel. (973) 515-3001 ~ FAX (973) 515-3004
 CAGE Code: 78YZO

<http://www.WerbelMicrowave.com>

1CN1352-dB

Connectors	Albaloy
Contact Pins	Beryllium Copper, Silver Plate
Insulators	PTFE
Housing	Aluminum, RoHS Chemical Conversion
Finish	Clear Chemical Conversion Film

VHF/UHF Directional Coupler

REV	DESCRIPTION	ENG.	DATE
0	Engineering release.	ETW	1/13/2017
1	ECN 1144.	ETW	6/30/2017

Input power is rated for load VSWR of 1.20:1, max. Insertion loss excludes coupling/split loss.
 All dimensions in inches with tolerance ± .010" and are typical unless otherwise specified.
 Specifications are subject to change without notice. This document shall not form part of any contract.