

Power Divider, 3-way, 2-18GHz, SMA Female

WM3PD-2-18-S

Description

WM3PD-2-18-S is a wideband 3-way in-line power splitter covering a continuous bandwidth of 2 to 18 GHz in a compact enclosure measuring 2.25 x 1.00 x 0.38 inches. The device is RoHS compliant. A proven product in regular production since 2016. This is a “true” three-way split; not an internally terminated 4-way, with excellent insertion loss and amplitude balance. This is inherently advantageous over a terminated 4-way because you will save a nominal 1.2dB of insertion loss and prevent unnecessary heating within the master enclosure. Assembled and tested in USA.



Photo is representative.

Specifications	Min.	Typ.	Max.	Units
Frequency	2	--	18	GHz
Impedance	--	50	--	Ohm
Return Loss (Port S)	10	13	--	dB
Return Loss (Ports 1-3)	13	16	--	dB
Insertion Loss (above 4.78dB)	--	0.8	1.3	dB
Isolation	15	22	--	dB
Amplitude Balance	--	0.3	1.0	dB
Phase Balance	--	3	12	Degrees
Input Power (CW) ¹	--	--	25	Watts

Mechanical



Connector Interface	SMA-Female
Operating Temperature ²	-55 to +85 °C
Storage Temperature	-55 to +100 °C
Weight Estimate	7 oz (200 g)
Humidity	10-90% non-condensing
Environment	Indoors Use Only
CAGE Code	78YZ0



Materials

RoHS Compliant ³	Yes
REACH Compliant ³	Yes
Enclosure	Aluminum
Connectors	Stainless Steel
Contacts	Be Cu, Gold Plated
Insulators	PTFE
Finish	Green Paint

1. All output ports should be terminated in a 50-ohm load with 1.2:1 max VSWR.
2. Electrical specifications at +25 °C only.
3. To the best of our knowledge at the time of publication.

Typical Performance at +25 °C

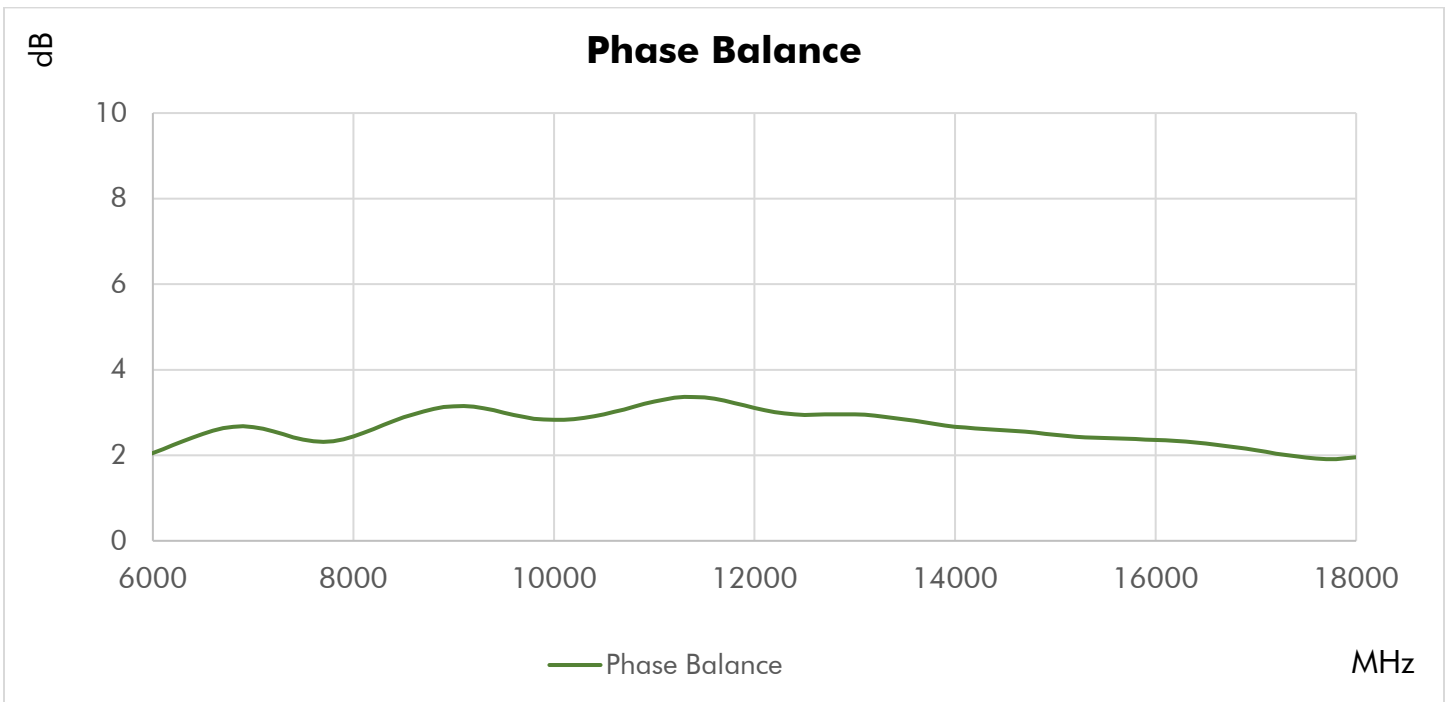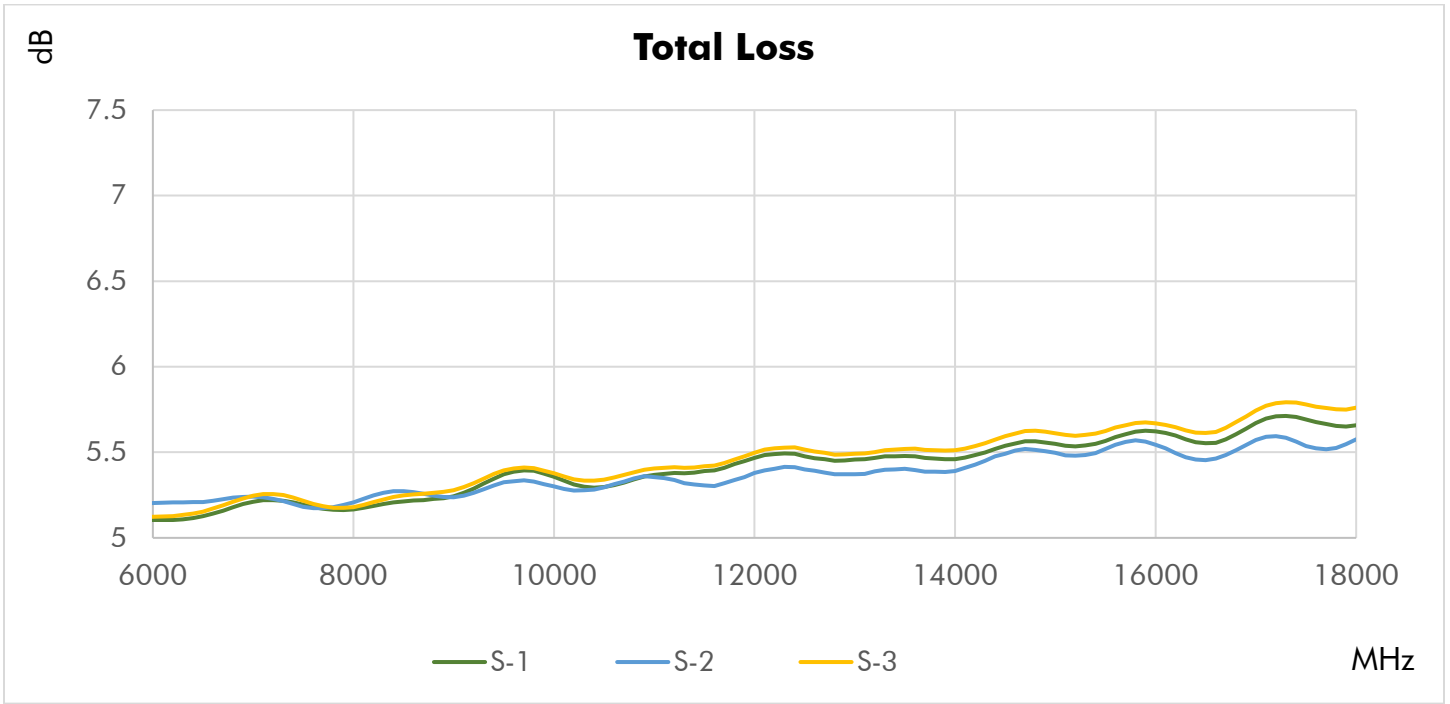


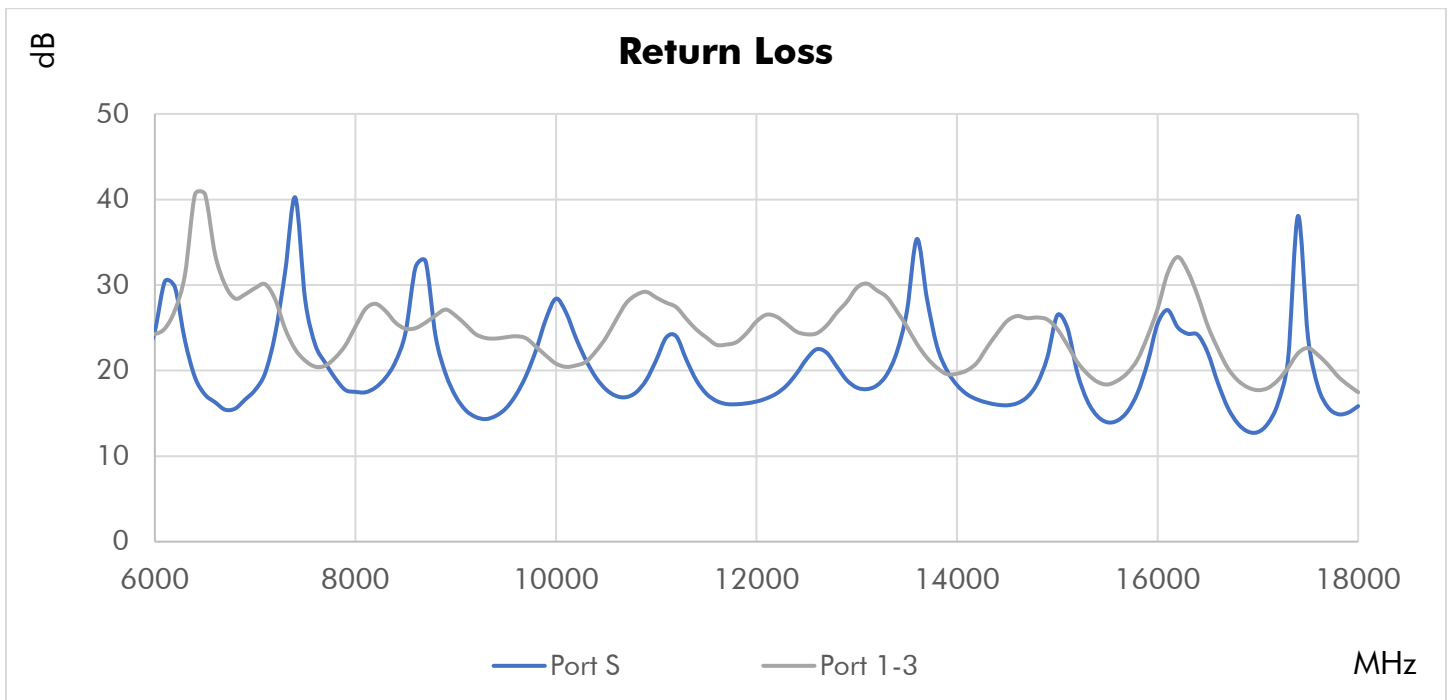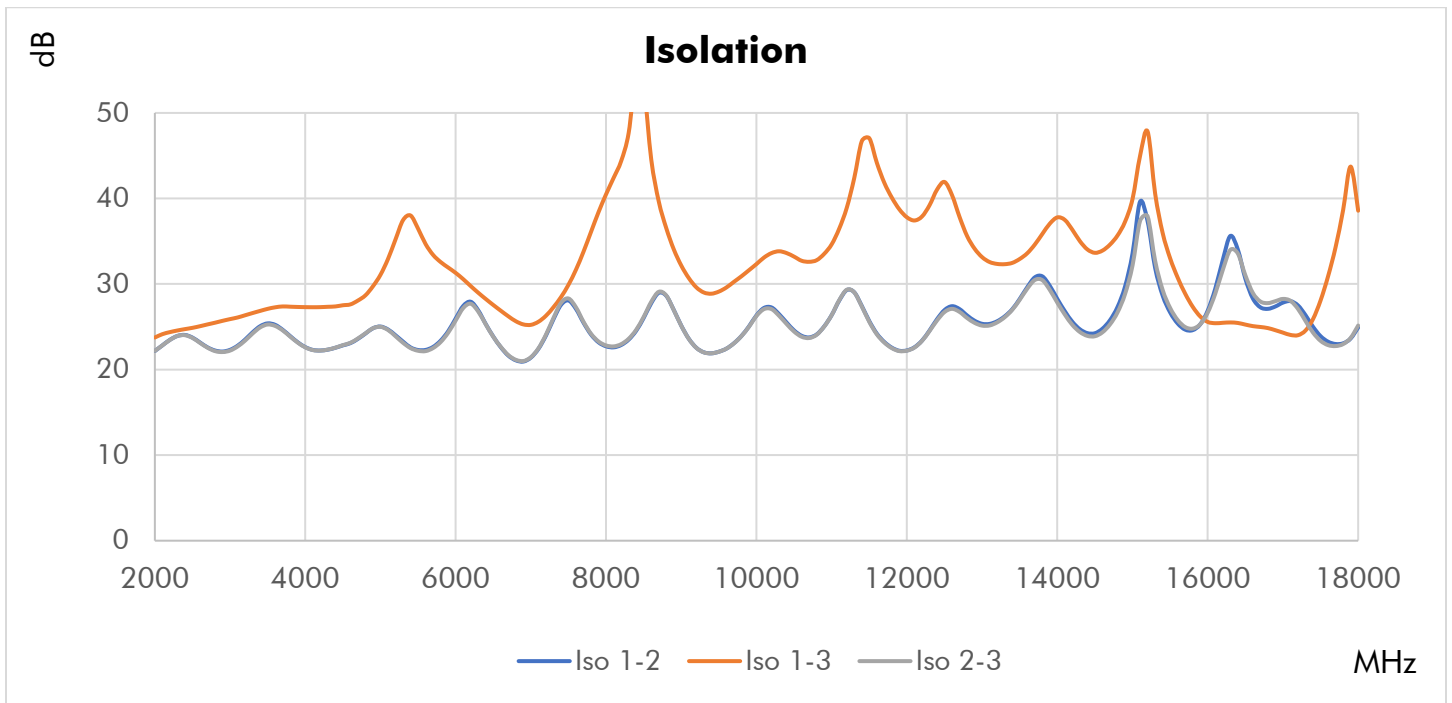

Typical Performance Data

Frequency (MHz)	Return Loss (dB)			Total Loss (dB)		Isolation (dB)	
	Port S	Port 1	Port 3	S-1	S-3	1-2	1-3
2000	19.5	27.5	28.3	5.0	5.0	22.2	23.8
2500	21.7	20.0	19.1	5.0	5.0	23.7	24.9
3000	20.6	21.3	21.4	5.0	5.0	22.3	25.9
3500	29.6	27.1	26.0	5.0	5.0	25.4	27.1
4000	20.1	27.0	25.0	5.0	5.0	22.6	27.3
4500	19.5	30.9	30.8	5.1	5.1	22.8	27.5
5000	23.8	21.2	20.5	5.1	5.1	25.0	31.1
5500	19.7	29.3	33.4	5.1	5.1	22.3	36.5
6000	24.6	32.7	27.2	5.1	5.1	26.0	31.3
6500	17.2	27.0	24.1	5.2	5.2	23.9	27.6
7000	17.7	24.8	22.7	5.2	5.3	21.4	25.2
7500	28.2	24.4	25.7	5.1	5.2	28.1	29.9
8000	17.5	25.6	23.2	5.2	5.2	22.7	40.5
8500	24.5	32.4	26.0	5.2	5.2	26.0	53.1
9000	17.0	20.4	19.1	5.3	5.4	25.1	32.2
9500	15.6	20.8	24.2	5.4	5.4	22.1	29.1
10000	28.4	27.8	25.2	5.3	5.3	26.4	32.3
10500	17.8	22.7	20.5	5.4	5.4	24.6	33.2
11000	21.2	24.0	24.6	5.3	5.4	26.4	34.7
11500	17.3	19.7	21.8	5.5	5.5	25.7	47.0
12000	16.4	24.0	22.6	5.5	5.6	22.2	37.8
12500	21.4	21.2	21.1	5.4	5.4	27.0	41.9
13000	18.0	21.5	23.2	5.5	5.5	25.4	33.1
13500	26.9	26.5	27.6	5.5	5.5	28.3	32.9
14000	18.3	24.7	26.1	5.5	5.6	28.3	37.8
14500	15.9	22.0	21.7	5.6	5.6	24.3	33.7
15000	26.5	24.4	25.6	5.5	5.5	33.6	40.0
15500	14.0	17.6	18.6	5.7	5.8	26.7	33.0
16000	25.5	29.0	30.8	5.5	5.6	26.9	25.6
16500	22.1	25.5	24.2	5.6	5.7	30.6	25.3
17000	12.8	17.4	17.3	5.8	5.9	27.8	24.3
17500	23.8	19.0	18.4	5.6	5.7	23.9	28.1
18000	15.8	17.8	16.5	5.7	5.8	24.9	38.6

Outline Dimensions

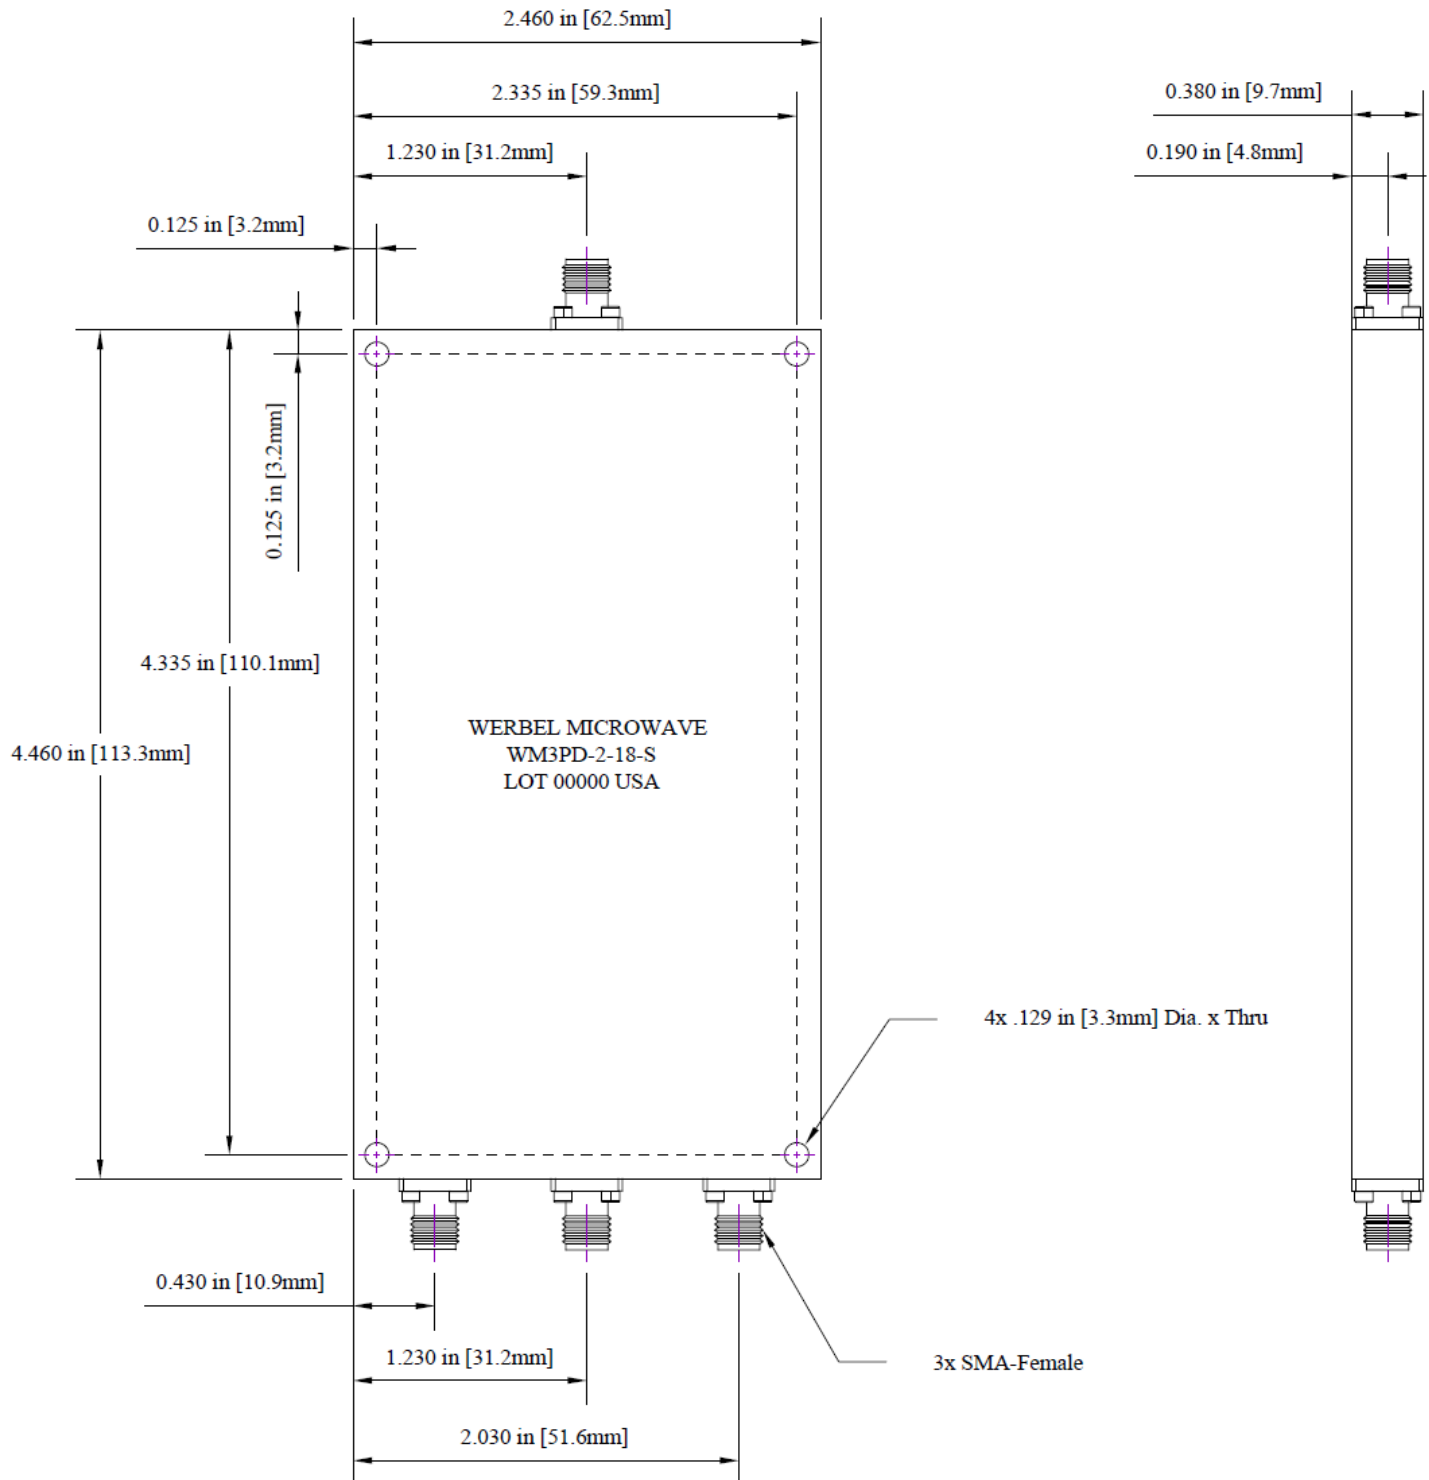

Outline drawing: OL-3182

Dimensions are in inches, [mm] shown for convenience.

Tolerances on 2-pl decimals: ±.03. 3-pl decimals: ± .015.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or documentation of the part, in order to implement improvements. Werbel Microwave LLC reserves the right to make such changes as required without notice. Unless otherwise stated, all specifications and dimensions are nominal. Werbel Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Werbel Microwave LLC does not assume any liability arising out of the use of any part of documentation. This document gives only a description of the product(s) and shall not form part of any contract. Please contact a Werbel Microwave LLC Applications Engineer for the most current specification drawing.