

## Directional Coupler, 0.5-2GHz, 30dB, SMA Female

## WMC-0.5-2-30dB-S

### Description

Model WMC-0.5-2-30dB-S from Werbel Microwave is a directional coupler that covers 500 MHz to 2 GHz with broadband flat coupling response, high directivity, and excellent return loss performance. The L-band applications for military radio are covered, as well as cellular 800-900MHz and the upper portion of UHF. The high coupling value allows for accurate measurements with minimal power diversion from the system. Return loss is typically better than 1.15:1, making it almost electrically invisible in your system. USA assembled, design and tested. The device is RoHS compliant, but lead solder is available on special order for military applications.



Photo is representative.

Specifications	Min.	Typ.	Max.	Units
Frequency	500	--	2000	MHz
Impedance	--	50	--	Ohm
Coupling	--	30 ± 1.0	--	dB
Frequency Sensitivity (Flatness)	--	± 0.50	± 0.75	dB
Mainline Loss <sup>1</sup>	--	0.25	0.35	dB
Directivity	23	26	--	dB
Return Loss (In and Out)	20	24	--	dB
Return Loss (Coupling)	20	23	--	dB
Input Power (CW) <sup>2</sup>	--	--	50	Watts

### Mechanical



Connector Interface	SMA-Female
Operating Temperature <sup>3</sup>	-55 to +85 °C
Storage Temperature	-55 to +100 °C
Weight	1.6 oz (45 g)
Humidity	10-90% non-condensing
Environment	Indoor use only.
CAGE Code	78YZ0



### Materials

RoHS Compliant <sup>4</sup>	Yes
REACH Compliant <sup>4</sup>	Yes
Enclosure	Aluminum
Connectors	Stainless Steel
Contacts	Be Cu, Gold Plated
Insulators	PTFE
Finish	Green Paint



1. Mainline loss includes coupling loss.
2. All output ports should be terminated in a 50-ohm load with 1.2:1 max VSWR.
3. Electrical specifications at +25 °C only.
4. To the best of our knowledge at the time of publication.

## Typical Performance at +25 °C

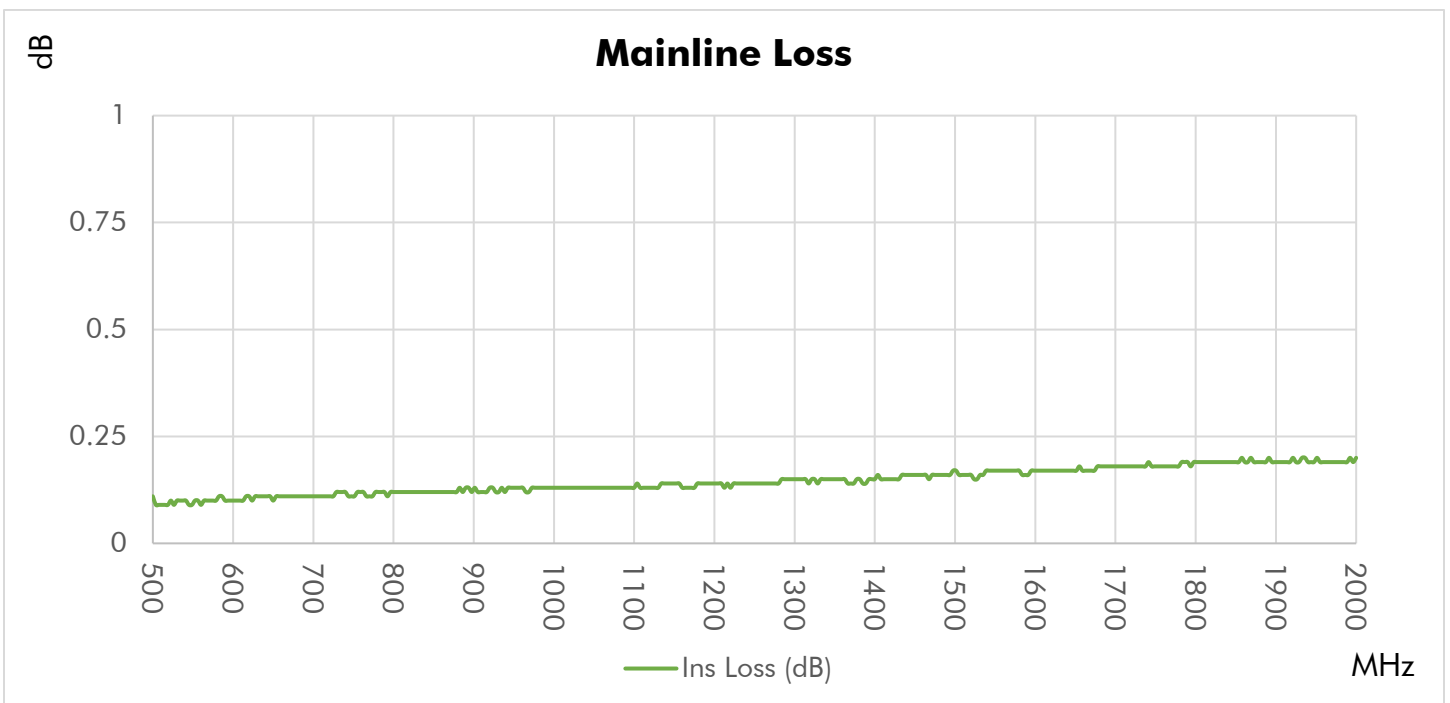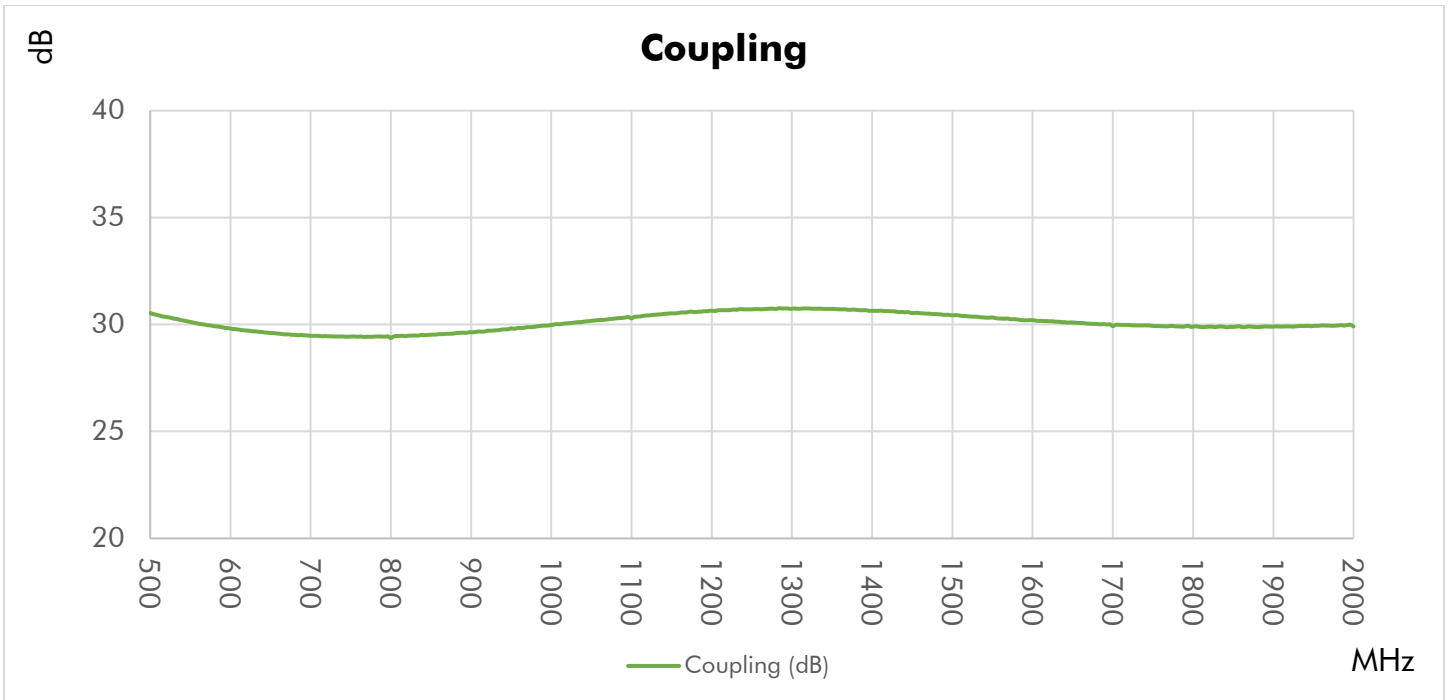

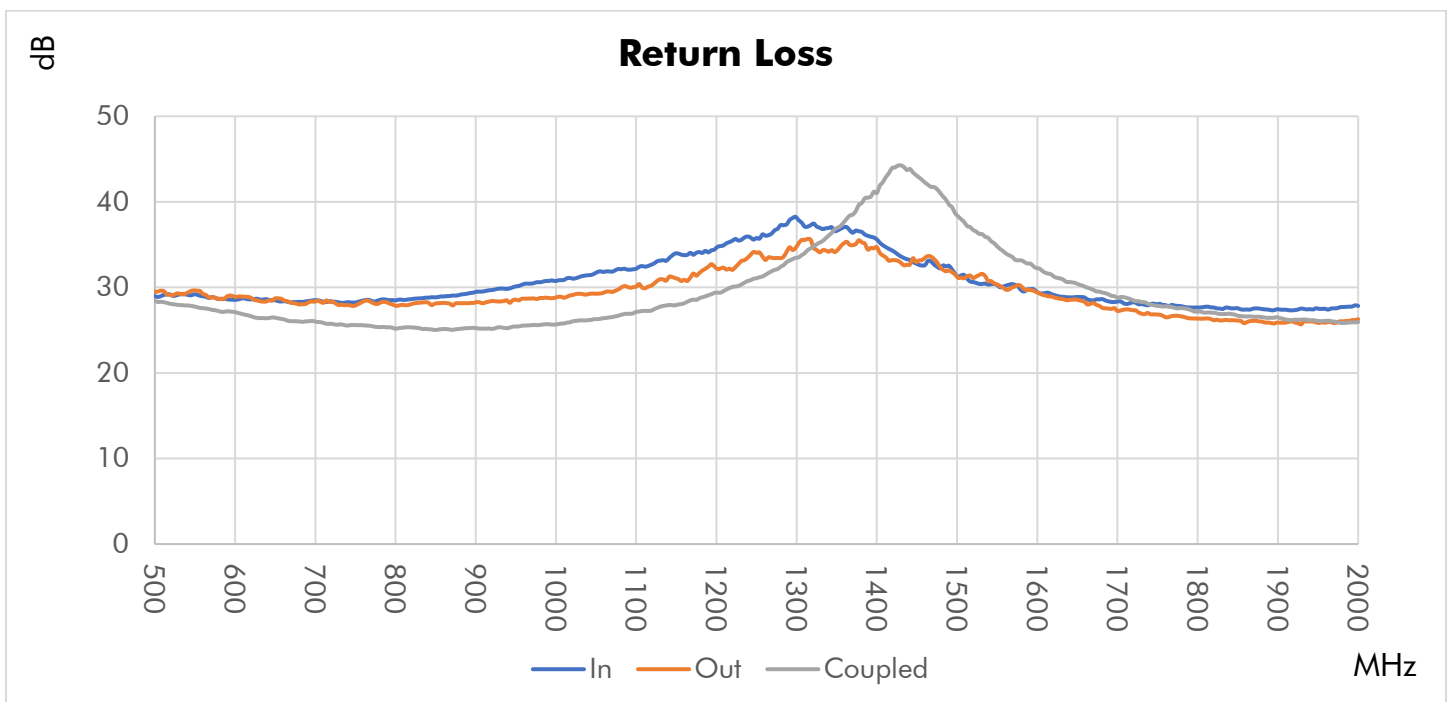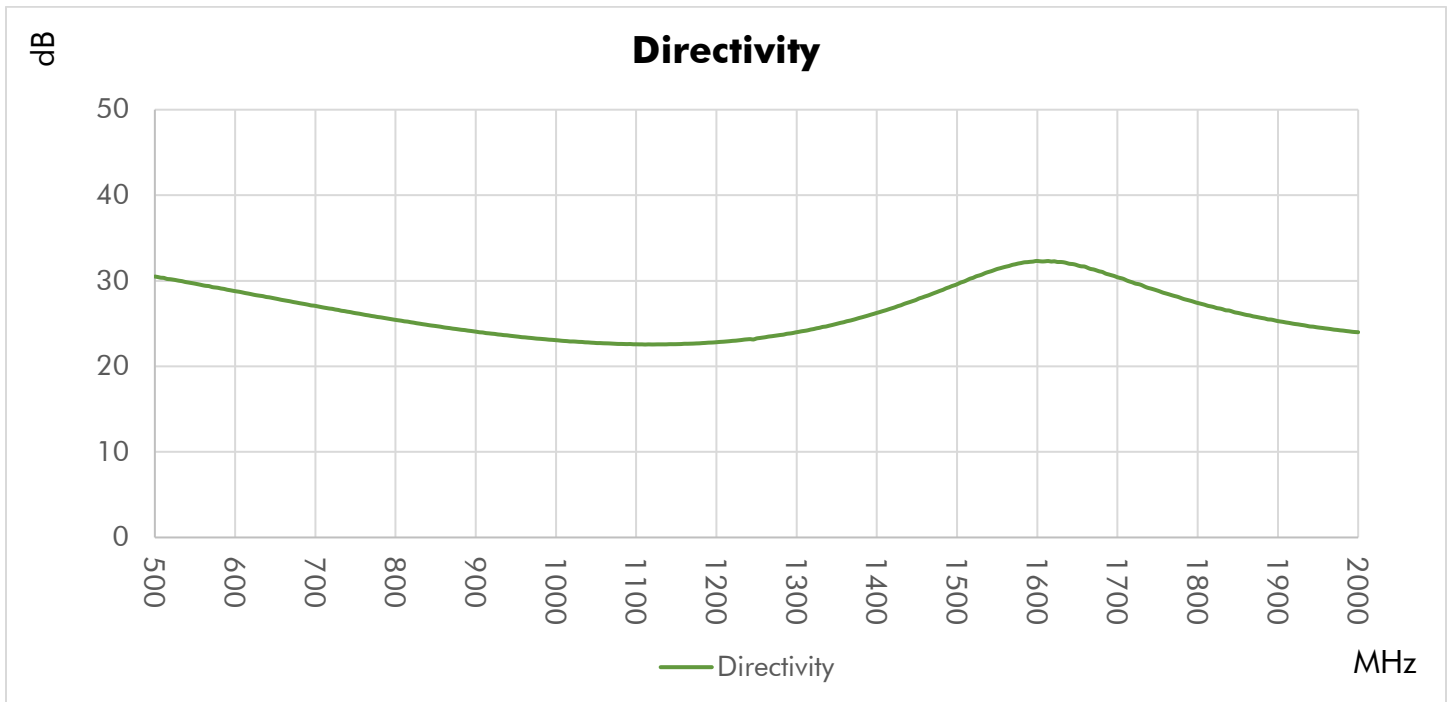


## Repeatability in Production

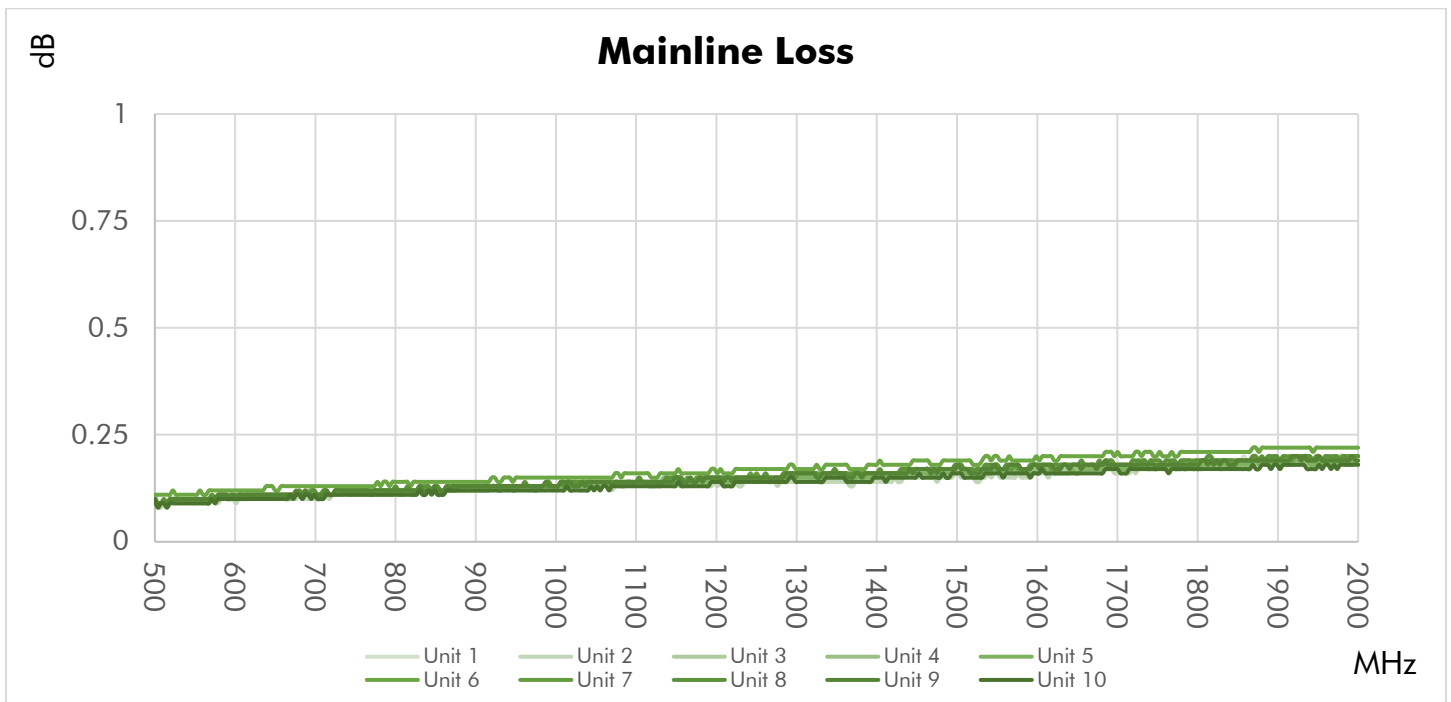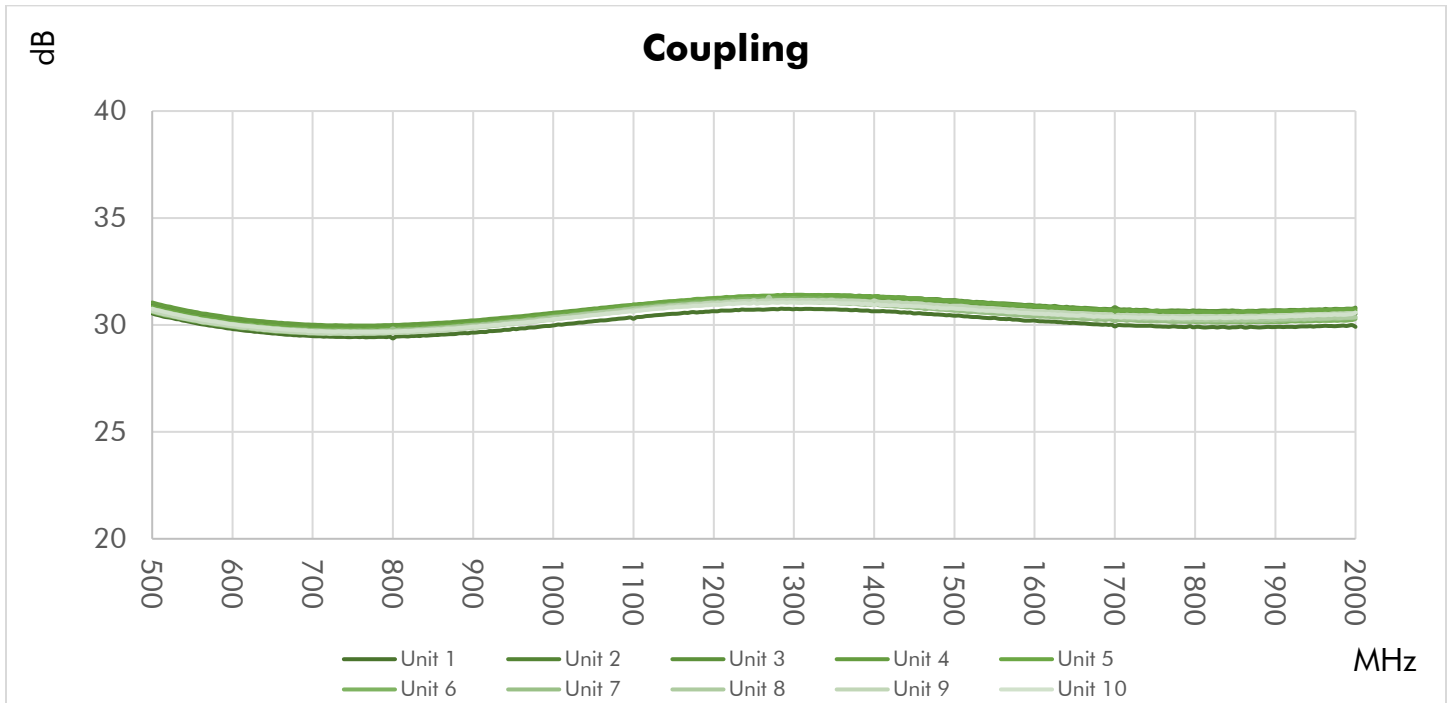

## Typical Performance Data

Frequency (MHz)	Return Loss (dB)			Mainline Loss (dB)	Coupling (dB)	Directivity (dB)
	In	Out	Cpl.	In-Out	In-Cpl.	
500	26.9	27.5	24.9	0.1	30.6	26.8
530	27.0	27.2	24.6	0.1	30.3	26.5
560	27.0	27.3	24.4	0.1	30.1	26.1
590	26.8	27.2	24.4	0.1	29.9	25.8
620	26.9	27.2	24.2	0.1	29.8	25.5
650	27.0	27.3	24.3	0.1	29.7	25.1
680	27.0	27.0	24.2	0.1	29.6	24.8
710	27.3	27.4	24.3	0.1	29.5	24.5
740	27.5	27.4	24.4	0.1	29.5	24.2
770	27.8	28.0	24.7	0.1	29.5	23.9
800	28.3	28.0	24.8	0.1	29.5	23.6
830	28.7	28.7	25.2	0.1	29.5	23.4
860	29.2	28.8	25.6	0.1	29.6	23.2
890	29.8	29.2	26.1	0.1	29.6	23.0
920	30.4	29.6	26.5	0.1	29.7	22.8
950	31.2	30.2	27.3	0.1	29.8	22.6
980	31.8	30.6	27.9	0.1	29.9	22.5
1010	32.6	30.7	28.8	0.1	30.1	22.4
1040	33.2	31.4	29.9	0.1	30.2	22.4
1070	33.6	31.4	31.0	0.1	30.3	22.4
1100	33.9	31.8	32.6	0.1	30.4	22.5
1130	34.6	32.4	34.0	0.1	30.5	22.6
1160	33.9	31.9	35.6	0.1	30.6	22.8
1190	33.6	32.4	37.2	0.1	30.6	23.0
1220	33.3	31.2	37.9	0.1	30.7	23.3
1250	32.2	32.0	37.7	0.1	30.7	23.6
1280	32.1	30.3	36.4	0.1	30.8	24.0
1310	30.7	30.9	34.6	0.1	30.8	24.4
1340	30.2	29.3	33.0	0.1	30.7	24.7
1370	29.6	29.2	31.7	0.1	30.7	25.1
1400	28.8	28.6	30.4	0.1	30.7	25.4
1430	27.9	27.8	29.5	0.1	30.6	25.7
1460	27.8	28.0	28.9	0.1	30.5	25.8
1490	27.5	27.2	28.2	0.1	30.4	25.8
1520	26.5	26.7	27.5	0.1	30.4	25.7
1550	26.5	26.4	27.0	0.1	30.3	25.6
1580	26.3	26.4	26.7	0.1	30.2	25.4
1640	26.0	25.8	26.1	0.1	30.0	24.8
1700	25.9	25.4	25.6	0.2	30.0	24.3
1760	25.8	25.0	25.4	0.2	29.8	24.0
1820	25.9	24.9	25.2	0.2	29.8	23.7
1880	25.9	24.8	24.7	0.2	29.8	23.6
1940	25.7	24.7	24.1	0.2	29.8	23.7
2000	25.5	24.5	23.3	0.2	29.8	23.7

## Outline Dimensions

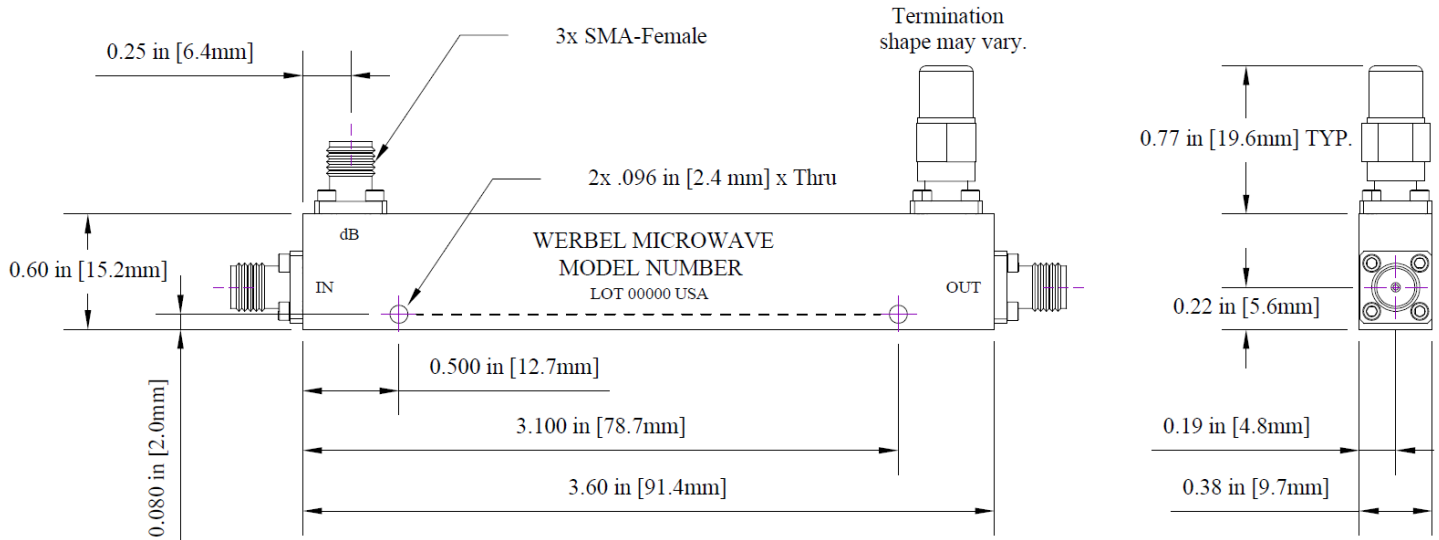

Outline # OL-1002

Dimensions are in inches, [mm] shown for convenience.

Tolerances on 2-pl decimals:  $\pm .03$ . 3-pl decimals:  $\pm .015$ .

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or documentation of the part, in order to implement improvements. Werbel Microwave LLC reserves the right to make such changes as required without notice. Unless otherwise stated, all specifications and dimensions are nominal. Werbel Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Werbel Microwave LLC does not assume any liability arising out of the use of any part of documentation. This document gives only a description of the product(s) and shall not form part of any contract. Please contact a Werbel Microwave LLC Applications Engineer for the most current specification drawing.